

19(7)

1979-12-1-24/79

AUTHORS: Yefimov, G. I., Glazov, M. I., Zolotarev, P. A., Academician

TITLE: The Influence of Surface-active Media on the Surface-Hardening of Metals (Vliyaniye poverkhnostno-aktivnykh sred na poverkhnostnyy nakley metallov)

PERIODICAL: Doklady Akademii nauk SSSR, 1979, Vol 17, No 1, pp 663-666 (USSR)

ABSTRACT: When investigating the hardening of metals it is necessary to distinguish between true and effective hardening. The true hardening of the slipping surfaces means increase of the shearing strength along a given surface with growing absolute shearing. The effective strengthening of a single grain as a single crystal characterizes the increase of the resistance of the metal to plastic deformation with increasing deformation and is expressed by the effective hardening coefficient  $A = d\tau/d\epsilon$ , where  $\epsilon$  denotes the specific crystallographic displacement in the grain. For the true hardening coefficient  $k$  it holds that  $k = d\tau/d\epsilon$ , where  $\tau$  denotes extreme tangential tension and  $\epsilon$  - the absolute shear. Between  $k$  and  $A$  the connection  $A = k/\alpha$  holds, where  $\alpha$  denotes

Card 1/1

NY 10-171-1-2/83  
The Influence of Surface-Active Media on the Surface-Hardening of Metals

the average density of the slip film, i.e., the effective coefficient of hardening; thus it depends not only on the true strengthening capacity of the slipping surfaces but also on the degree of dispersion of the crystal during deformation. The present paper describes the results obtained by the complex investigation of the kinetics of the formation of the hardened layer in the surface hardening of technically pure iron in air and in some active media. In this connection, the influence exercised by some given effects produced by the hardening instrument (small roll) upon the microhardness of the sample surface, the friction force, the structure of the hardened surface of the sample, the specific work of hardening, and the temperature at the place of contact between roll and sample, are investigated. These investigations were carried out by the method developed by V. Ya. Lezhikov (Ref 3) in an improved form. A diagram shown, by way of an example, the results obtained by experiments carried out in air and in a 0.2% solution of stearic acid in Decalin. The microhardness  $H_0$  increases with an increase of the number of hardening actions; this increase is irregular and passes

Card 2/4

100/20-100-4-20/53

The Influence of Surface-Active Media on the Surface-Hardening of Metals

through several maxima. A very characteristic quantity is the differential work of the plastic pressing-in of a hole ( $a = dA/dV$ ). This quantity conveys an idea of the degree of resistance offered by the sample to growing plastic deformation. Surface-active media exercise a dual influence upon the process of metal surface hardening: As a result of the reduction of strength due to adsorption, they facilitate the development of plastic deformation during the first stages of hardening and they cause an intense strengthening of the surface layer during the following stages of hardening. The strengthening and plasticizing effect produced by surface-active media is able to influence the process of metal cold-working considerably. In the cutting of metals the strengthening and plasticizing effects of these metals usually lead to the same result, viz. to a reduction of the degree of volume-deformation of the cuttings and of the surface layer of the workpiece. There are 3 figures and 1 Soviet reference.

~~Conf 2/4~~

AUTHORS: Glagolev, N.I. and Yepifanov, G.I. SOV/170-59-3-4/20

TITLE: Investigation of the Kinetics of Formation of a Hardened Layer During the Surface Cold Hardening of Metals (Issledovaniye kinetiki formirovaniya uprochnennogo sloya pri poverkhnostnom naklepe metallov)

PERIODICAL: Inzhenerno-fizicheskii zhurnal, 1959, Nr 3, pp 29-35 (USSR)

ABSTRACT: Surface cold hardening plays now an important part in modern machine-building as it leads to increasing fatigue strength of machine parts, decreasing sensitivity to surface imperfections, higher resistance ability with respect to corrosion, adsorption effects, etc. Although many investigations dealt with structural and mechanical changes arising after cold hardening, the role of physico-chemical interaction of the metal subjected to cold hardening with the surrounding media has not been studied thus far. The authors undertook to investigate the role of physico-chemical factors in the run of this process and in the formation of the hardened layer. The methods used in the previous investigations by Lyubimova et al. [Ref. 2] were employed also by the authors for studying the kinetics of this formation. The cold hardening was performed with a roller which was pressed to the surface of an iron sample by a normal load of 4 and, in other experiments, of 8 kg. The microhardness of the formed depressions was measured with a PMT-3 device. The results of

Card 1/3

SOV/170-59-3-4/20

Investigation of the Kinetics of Formation of a Hardened Layer During the Surface Cold Hardening of Metals

experiments are represented by the curves in which the values of microhardness are plotted versus the number of flattenings made by the roller. The analysis of these curves makes it possible to qualitatively understand the kinetics of the process of cold hardening. The surface layer is hardened with the increasing number of flattenings up to a certain maximum; then the microhardness falls down and rises again. Sometimes there are 2 peaks on the curve. The authors interpret this phenomenon by a hypothesis that the surface hardened layer is periodically transformed into a glass-like substance which becomes brittle and is destroyed by the subsequent flattenings of the roller. The application of some active lubricants has a positive effect on the formation of the layer. It considerably accelerates the process of plastic deformation of the surface in the first stages of formation of the layer, and considerably heightens its mechanical properties in the successive stages of its formation as the microhardness attains a value of about 400 kg/sq mm. This indicates that the surface layer interacts in some way with the active media, since the maximum hardness of iron which can be obtained with ordinary methods

Card 2/3

SOV/170-59-3-4/20

Investigation of the Kinetics of Formation of a Hardened Layer During the Surface Cold Hardening of Metals

of cold hardening amounts only to half of this value. The data available at present do not permit to decide the question on the nature of the hardened layer formed in the presence of the active media.

There are 2 graphs, 1 diagram, 1 set of microphotos and 3 Soviet references.

ASSOCIATIONS: Mashinostroitel'nyy institut (Machine-Construction Institute), Moscow. Pedagogicheskiy institut imeni L.N. Tolstogo (Pedagogical Institute imeni L.N. Tolstoy), Tula

Card 3/3



GLAGOLEV (1911-1971)

For the past 10 years, the Soviet Union has been  
increasing its military power. (EX-100)

L 55051-65 EWT(d)/EWT(m)/EWP(w)/EWT(o)/EWA(d)/EWT(w)/T/EWP(t)/EWT(k)/EWP(h)/EAT(b)/  
EWP(l) Pf-4 JD  
ACCESSION NR: AT5010243 UR/2711/64/000/019/0146/0172

AUTHOR: Glagolev, N. I.

TITLE: Rolling friction and wear

SOURCE: AN SSSR. Institut mashinovedeniya. Treniye i iznos v mashinakh, no. 19, 1964.  
Iznos i treniye metallov i plastmass (Wear and friction of metals and plastics), 146-172

TOPIC INDEX: RAILWAY  
force work, wheel tire wear

ABSTRACT: Assuming a simplified model (i.e. wheel and rail material elastic and subject to plane deformation, wheel axis velocity constant, angular velocity of wheel rotation around its axis constant, line of contact rectilinear, etc.), the author defines the rolling friction of railway rolling stock wheels and the wear of wheels and rails mathematically. Specific calculations are presented for rolling friction and traction, assuming wheels and rails of identical material. It is also demonstrated that a difference in material produces insignificant variations in the results obtained. Discussing the work of friction forces in relation to the wear of rolling bodies (i.e. wheels), the author reviews data obtained by various authors, performs the appropriate verifying calculations, and concludes that the theory of linear dependence between magnitudes of work performed by friction forces

L 55051-65

ACCESSION NR: AT5010243

and values for wear of rails and wheels is correct to a sufficient degree in a number of instances under the conditions assumed by him. The obtained expressions are employed to illustrate several specific examples of numerical calculations relating to the driving and driven wheels of the VL-22M electric locomotive and to track rails. Orig. art. has: 3 figures, 1 table and 16 numbered formulas.

ASSOCIATION: None

SUBMITTED: 00

ENCL: 00

SUB CODE: IE

NO REF SOV: 029

OTHER: 006

Card

2/2

GLAGOLEV, Nil Aleksandrovich; GLAGOLEV, A.A.

[Geometry]Geometriia; uchebnik dlia 6-9 [9-10] klassov  
srednei shkoly. Pod red. A.A.Glagoleva. Izd.4. perer.  
Moskva, Gos.uchebno-pedagog.izd-vo, 1958. 2 v.  
(MIRA 16:3)

(Geometry)

GLAGOL'EV, NIKOLAI MATVEEVICH, ed.

Vozdusnyi flot; istoriia i organizatsiia voennago vozdukhoplavaniia. [The air fleet;  
history and organization of military aeronautics]. 2. izd. Petrograd, Izd. T-ve  
I.D.Sytina, 1915. 109 p. illus. CST-H  
DLC: U6630.C48 1915a

SO: Soviet Transportation and Communications, A Bibliography, Library of Congress,  
Reference Department, Washington, 1952, Unclassified.



GIAGOLEV, N. M.

Teplovozy; obshchii kurs. Utverzhdeno...v kachestve osnovn. posobie dlia vtuzov  
zhel-dor. transporta. Moskva, Frantsheiderizdat, 1948. 387 p. illus.

Bibliography: p. 385-(386)

Diesel locomotives; a general course.

DIS: 38619.16

3C: Manufacturing and Mechanical Engineering in the Soviet Union, Library of  
Congress, 1953.

GLAGOLEV, N. N.

Glagolev, N. . "Computing composition in letters with electrical indications."  
Nauch. zapiski Khark. nauchno-tekhn. inst. in-za, Vol. 10, Issue 1, 1943  
p. 57-69

GLAGOLEV, N. M.

Rabochie protsessy dvigatelei vnutrennego sgoraniia: novyi metod  
rascheta. Kiev, Mashgiz, (Ukr. otd-nie) 1950. 479 p. diagrams, tables.  
Bibliography: p. 477-478)

Operations of internal combustion engines; a new method of  
calculation.

LOC: TJ785.G56

SO: Manufacturing and Mechanical Engineering in the Soviet Union, Library of  
Congress, 1953.

KIRAKOVSKIY, N.F., dotsent; GLAGOLEV, N.M. professor, doktor tekhnicheskikh nauk; retsenzent; PERLIN, Yu.Ye., kandidat fiziko-matematicheskikh nauk, retsenzent; LAVRINENKO, Ye.T., inzhener, redaktor; RUDENSKIY, Ya.V., tekhnicheskiiy redaktor.

[Stationary gas engines; calculations and construction] Statsionarnyye gazovyye dvigateli; raschet i konstruktsii. Kiev, Gos. nauchno-tekhn. izd-vo Mashinostroyt. lit-ry, 1953. 277 p. (MLRA 9:2)  
(Gas and oil engines)

SLAGOLY, N. ...

The Committee on Science and Higher Education of the Council of Ministers of the USSR in the fields of science and inventions announces that the following scientific works, popular science books, and textbooks have been submitted for competition for Stalin Prizes for the years 1946 and 1947.

Name	Title of work	Institution
Glagolov, N. ...	"Working Processes of Internal Combustion Engines. A New Method of Calculation"	Moscow Polytechnic Institute named V. I. Lenin

GLAGOLEV, N. N.

AID P - 592

Subject : USSR/Engineering

Card 1/1 Pub. 93 - 8/11

Author : Glagolev, N. N., Engineer

Title : Universal clearance gage for measuring the air gap  
between stator and rotor of electrical machines

Periodical : Sbor. mat. o nov. tekhn. v stroit., 8, 18-19, 1954

Abstract : A clearance gage is described for measuring air gaps  
between 1.5 to 15 mm. Diagrams show the details.

Institution: None

Submitted : No date

KLAVDIY  
KIRAKOVSKIY, N.P., dotsent; GLAGOLEV, N.M., professor; SHELUD'KO, I.M.  
dotsent, redaktor; SERDYUK, V.K., inzhener, redaktor; HUDZINSKIY,  
Ye. V., tekhnicheskiy redaktor.

[Stationary internal combustion engines; operation, adjustment,  
testing. A reference manual] Statsionarnyye dvigateli vnutrennego  
sgoraniya; kontrol', naladka, isputanie. Spravochnoe rukovodstvo.  
Kiev, Gos.nauchno-tekhn.izd-vo mashinostroitel'noi lit-ry, Ukrain-  
skoe otd-nie, 1955. 402 p. (MLRA 8:11)  
(Gas and oil engines)

PHASE I BOOK EXPLOITATION

523

Glagolev, Nikolay Matveyevich, Professor; Kurits, Aleksandr Artyevich;  
Vodolazhchenko, Vitaliy Vasil'yevich; and Bartosh, Yevgeniy Tarasovich,  
Candidates of Technical Sciences

Teplovchnyye dvigateli i gazovyye turbiny (Diesel and Gas-turbine Locomotive  
Engines) Moscow, Transzheldorizdat, 1957. 463 p. 10,000 copies printed.

Ed.: Girshberg, N. M., Candidate of Technical Sciences; Tech. Ed.: Bobrova, Ye. N.

PURPOSE: This book is approved by the USSR Ministry of Higher Education as a text-  
book for institutes of railroad transportation. It may also be useful to  
engineers specializing in internal combustion engines, and gas turbines.

COVERAGE: The book deals with basic theory and design in the construction of the  
modern diesel and gas-turbine locomotives. The following subjects are  
discussed: working processes and cycles, engine dynamics, principle of work,  
economy and performance characteristics, automation of control systems,  
engine output control, locomotive operation, and safety. In addition to these  
topics the author also gives a brief history of the development and uses

Card 1/12

Diesel and Gas-turbine (Cont.)

323

of internal combustion engines and gas turbines. The author claims that gas-turbine engines require less time to develop full power capacity than steam turbine engines. He also claims that aircraft gas turbines are able to develop full power capacity within 1.5 to 2 minutes, and that gas turbines in the aircraft industry are fully understood and are widely used on many types of aircraft. According to the author, the 1956 statistics show that Soviet gas turbine engines, not considering those used in aircraft, are able to develop power of about one million hp. A special chapter is devoted to discussion of free-piston gasifiers and prospects for their development and use. The author states that the Voroshilov Diesel Engine Locomotive Plant has developed a free piston-and-turbine compound locomotive engine with a capacity of 6,000 hp. and an efficiency of 29.4 percent. The book contains numerous tables, graphs, diagrams and detail drawings of various types of Soviet and foreign internal combustion engines and gas turbines. There are 84 references of which 82 are Soviet and 2 English.

Card 2/12

Diesel and Gas-turbine (Cont.)

323

TABLE OF  
CONTENTS:

From the authors	3
Introduction	4

PART 1. WORKING PROCESSES AND ENGINE DYNAMICS

Ch. I. Engine Fundamentals	
1. Mechanisms of internal combustion	9
2. Thermodynamic cycles	15
Ch. II. Principle of Function and Classification of Internal Combustion Engines	
1. Fundamentals of working cycle	22
2. Self-ignited engines	26
3. Carburetion in self-ignited engines	32

Card 3/12

Diesel and Gas-turbine (Cont.)	323	
4. Diesel Engines with Solid injection systems		36
5. Carburetor engines		39
6. Gas engines		43
7. Engines with liquid fuel injection and electric or glow ignition systems		45
8. General survey of engine classification		47
Ch. III. Performance and Economy Characteristics of Engines		
1. Types of performance and economy characteristics		50
2. Indicator mean-effective pressure		52
3. Engine horsepower		55
4. Efficiency		57
5. Cost per unit of work		58
6. Other characteristics		61
Ch. IV. Fuels and Products of Combustion		
1. Liquid fuels		62
2. Gaseous fuels		63
3. Basic properties of fuels		69

Card 4/12

323

Diesel and Gas-turbine (Cont.)

4. Products of fuel combustion
5. Ratio of number of moles in products of combustion to the number of moles in fuel mixture before combustion
6. Specific heat of gases

76

79

81

Ch. V. Working Processes and Principles of Calculation

1. Intake in four-stroke-cycle engines
2. Simplified calculations of intake in four-stroke-cycle engines
3. Supercharging engines
4. Scavenging and intake in two-stroke-cycle engines
5. Carburetion and combustion
6. Calculation of compression, combustion and expansion
7. Basic characteristics of working processes
8. Heat balance engines

85

90

95

101

106

113

116

119

Card 5/12

Diesel and Gas-turbine (Cont.)

323

Ch. VI. Engine Characteristics

1. Concept of characteristics	125
2. External characteristics	129
3. Load characteristics	138
4. Economy characteristics	142

Ch. VII. Engine Dynamics

1. Forces and moments acting in the crankshaft and connecting rod assemblies	144
2. Balancing engines	147
3. Torsional vibration	152
4. On determining the frequency of torsional vibration	159
5. Distribution mechanism	162
6. Engine speed control (RPM)	164

Card 6/12

Diesel and Gas-turbine (Cont.)

323

PART 2. CONSTRUCTION OF DIESEL-LOCOMOTIVE ENGINES

Ch. VIII. Modern Designs Diesel Locomotive Engines

- |   |     |
|---|-----|
| 1. Basic requirements and characteristics of diesel locomotives engines           | 172 |
| 2. Four-stroke-cycle diesel locomotive engines                                    | 177 |
| 3. Two-stroke-cycle diesel locomotives engines                                    | 197 |
| 4. Free-piston gasifiers and prospects for development                            | 208 |
| 5. Gasifier power installations in locomotives and prospects for application      | 212 |
| 6. Principles of standard design for mass production of diesel locomotive engines | 217 |

Ch. IX. Elements of Crankshaft and Connecting Rod Assemblies

- |                                  |     |
|----------------------------------|-----|
| 1. Crankshafts                   | 220 |
| 2. Connecting rods and rod bolts | 230 |
| 3. Pistons                       | 233 |

Card 7/12

323

Diesel and Gas-turbine (Cont.)

4. Piston rings
5. Piston pins and connecting rod end bearings

244  
250

Ch. X. Parts of Engine Framework

1. Frames, blocks, and crankshafts
2. Cylinder sleeves
3. Bushings for crankshaft bearings
4. Cylinder heads
5. Fuel distribution systems
6. Camshaft drives and vertical spindle transmission

254  
259  
264  
271  
275  
278

Ch. XI. Solid Injection Diesel Engine Fuel Systems and Control

1. Fuel systems
2. Control of diesel-engine output

282  
298

Card 8/12

Diesel and Gas-turbine (Cont.)

323

Ch. XII. Auxiliary Apparatus and Systems for Diesel Locomotive Engines

- |   |     |
|---|-----|
| 1. Engine cooling                                 | 305 |
| 2. Engine lubrication                             | 309 |
| 3. Selecting types of blowers and installing them | 314 |

Ch. XIII. Automation of Control Systems, Remote Control of Diesel Locomotive Engines, and Safety Signal Systems

323

### PART 3. GAS TURBINES

Ch. XIV. Typical Schematic Diagrams and Thermodynamic Calculations of Gas-turbine Units

- |   |     |
|---|-----|
| 1. Basic elements and typical schematic diagrams of gas-turbine units | 333 |
| 2. Thermodynamic calculations of gas-turbine units                    | 339 |
| 3. Entropy diagram  | 347 |

Card 9/12

Diesel and Gas-turbine (Cont.)

323

Ch. XV. Working Processes of Gas Turbines

- |   |     |
|---|-----|
| 1. Basic information on gas turbines                        | 351 |
| 2. Conversion of energy in the nozzle and the nozzle design | 354 |
| 3. Gas blade work   | 359 |
| 4. Turbine efficiency                                       | 363 |
| 5. Fundamentals of gas-turbine design                       | 365 |

Ch. XVI. Working Processes of Axial-flow and Centrifugal Compressors

- |   |     |
|---|-----|
| 1. Basic information on compressors                                   | 377 |
| 2. Basic theory of compressors  | 379 |
| 3. Characteristics of working processes of axial-flow compressors     | 383 |
| 4. Characteristics of working processes of centrifugal compressors    | 389 |
| 5. Interdependence of compressor and gas-turbine operating conditions | 392 |

Card 10/12

Diesel and Gas-turbine

323

Ch. XVII. Combustion Processes and Heat Transfer in Gas-turbine Units

- |  |     |
|--|-----|
| 1. Process of heat transfer in gas-turbine units | 395 |
| 2. Combustion chambers                           | 397 |
| 3. Air heat-exchanger tanks                      | 404 |
| 4. Regenerators                                  | 411 |

Ch. XVIII. Locomotive Gas-turbine Installations

- |   |     |
|---|-----|
| 1. Typical schematic diagrams of locomotive gas-turbine installations                         | 415 |
| 2. Present status of gas-turbine development and construction of locomotive gas-turbine units | 420 |

Ch. XIX. Design of Compressor and Gas-turbine Elements

- |   |     |
|---|-----|
| 1. Elements of gas turbines                           | 432 |
| 2. Elements of axial-flow and centrifugal compressors | 442 |

Ch. XX. Materials Used in Manufacture of Gas Turbines

446

Card 11/12

Diesel and Gas-turbine

323

PART 4.

Ch. XXI. Diesel Engine Tests

- |  |     |
|--|-----|
| 1. Purpose and types of tests  | 451 |
| 2. Extent of tests and procedures  | 452 |
| 3. Values to be measured and rating of test results                              | 454 |
| 4. Methods of measuring and instruments used. Measurement of<br>brake horsepower | 456 |

Bibliography

460

AVAILABLE: Library of Congress

CO/bmd  
1 July 1958

Card 12/12

ABRAMOV, S.A., inzhener; VOROB'YEV, N.M., inzhener; GLAGOLEV, N.M., doktor  
tekhnicheskikh nauk, professor; MERLIS, P.M., inzhener; MAZGULIS,  
P.S., kandidat tekhnicheskikh nauk; RISKIN, I.V., inzhener;  
PUFRIYANSKIY, N.A., doktor tekhnicheskikh nauk, professor

Selecting types of diesels for projected diesel locomotives. Vest.  
TSNII MPS 16 no.2:11-18 Mr '57. (MLRA 10:4)  
(Diesel locomotives)

26(4)

PHASE I BOOK EXPLOITATION

SOV/1229

Glagolev, Nikolay Matveyevich

Ispytaniye dvigateley vnutrennego sgoraniya (Testing Internal Combustion Engines) Khar'kov, Izd-vo Khar'kovskogo univ-ta, 1958. 294 p.  
5,000 copies printed.

Resp. Ed.: Sukhorukov, A.R.; Ed.: Bazilyanskaya, I.L.; Tech. Ed.:  
Trofimenko, A.S.

PURPOSE: This is a textbook approved by the Ministry of Higher Education of the Ukrainian SSR for students of technical vuzas.

COVERAGE: This book complies with the program for a course on engine testing in polytechnical and machine-building insitutes. The book consists of a systematic description of basic tests for all types of engines operating on liquid, gas, and mixed fuels. The book also contains results of the author's investigations concerning a) the theory of simultaneous effect of radiation and heat losses on the

Card 1/7

Testing Internal Combustion Engines SOV/1229

measurement of temperature b) the determination of the coefficient of air excess by analysis of gases in a gas engine, or in engines fed with mixed fuels. The methods of measurement are presented in concise form. The description of typical instruments for each kind of measurement is given. The bibliography contains 198 items and is keyed to the chapters.

TABLE OF CONTENTS:

Preface	3
Ch. 1. Classification and Organization of Tests	
1. Types of industrial tests	6
2. Organization of tests	8
3. Values measured in tests	10

Card 2/7

Testing Internal Combustion Engines

SOV/1229

Ch. 2. Measurement of Pressure

- |                        |    |
|------------------------|----|
| 1. General information | 16 |
| 2. Metal manometers    | 18 |
| 3. Liquid manometers   | 21 |

Ch. 3. Measurement of Temperature

- |  |    |
|--|----|
| 1. General information   | 27 |
| 2. Physical processes in the measurement of temperatures             | 28 |
| 3. Mercury thermometers  | 29 |
| 4. Thermoelectrical instruments                                      | 33 |
| 5. Resistance thermometers   | 38 |
| 6. General errors of measurement due to the set-up of the instrument | 44 |

Thermal processes in measuring instruments - 44, Methods for correct set-up of instruments - 46, Computation of errors due to thermal processes - 49.

- |  |    |
|--|----|
| 7. Some special cases of temperature measurement | 55 |
|--|----|

Card 3/7

Testing Internal Combustion Engines

SOV/1229

Exhaust gas temperature - 55, Temperature of solid bodies - 60, Temperature of gases in a cylinder - 61.

Ch. 4. Gas Analysis

- |   |    |
|---|----|
| 1. Gas analysis in engine tests   | 63 |
| 2. Simple analysis of gases   | 64 |
| 3. Analysis of gases with complete burning  | 67 |
| 4. Humidity of gases  | 71 |
| 5. Control of exhaust gas analysis of a liquid fueled engine  | 72 |
| 6. Determining the coefficient of excess air according to the composition of exhaust products of a liquid or solid fuel | 77 |
| 7. Determining the coefficient of excess air according to the composition of gas fuel and its combustion products       | 81 |
| 8. Determining the coefficient of excess air by analysis of gases in engines working on mixed fuels                     | 88 |
| 9. Composition of exhaust gases   | 92 |

Card 4/7

Testing Internal Combustion Engines

SOV/1229

a) Gas fuel - 93, b) Liquid fuel - 97, c) Mixed fuel - 99

Ch. 5. Quantitative Measurement of Gases and Liquids	
1. Measurement of the consumption of gases and liquids in engine tests	102
2. General basis of the diaphragm method	102
3. Measuring consumption with a standard diaphragm	112
4. Measuring consumption of gases or liquids by means of pressure pipes	122
5. Other methods of gas consumption measurement	122
Rounded-off diaphragms, nozzles, Venturi tubes, - 130, Anemometers - 131, Volumetric methods - 131, Electrical methods - 133, Indirect methods - 134.	
6. Measurement of the consumption of water and oil	139
7. Measurement of the consumption of a liquid fuel	139
Ch. 6. Determining the Heat Producing Capacity of a Fuel	
1. Calorimetric bomb	144
2. Yunkers' calorimeter	148
Card 5/7	

Testing Internal Combustion Engines

SOV/1229

Ch. 7. Engine Indicators

1. General information 156
2. Indicating low-speed engines 158
3. Indicating high-speed engines 174
4. Electro-pneumatic indicator 182
5. Brief survey of main features of using electro-pneumatic indicators 192
6. Primary work-out and checking of diagrams produced with an electro-pneumatic indicator 199
7. Practical applications for indicator diagrams 204
8. Determining maximum pressure in the cylinder 207

Ch. 8. Measurement of Power

1. Measurement of the speed of rotation 210
2. Laboratory methods of measuring power. Brakes. 213
3. Operational methods of measuring effective power 220
4. Determining average indicated pressure 222

Card 6/7

Testing Internal Combustion Engines

SOV/1229

5. Indicated power	229
6. Determining mechanical losses	232
Ch. 9. Heat Balance of an Engine	234
1. Composition of heat balance	240
2. Example of heat-balance testing. Measuring instruments	253
3. Continuation of the example. Test results and their treatment	286
Bibliography	

AVAILABLE: Library of Congress

IS/ksv  
3-11-59

Card 7/7

GLAGOLEV, N.M., prof., doktor tekhn.nauk

Future engines for mainline diesel locomotives. Zhel. dor.  
transp. 40 no.9:24-29 S '58. (MIRA 11:10)  
(Diesel locomotives)

SOV/12-59-3-1/41

AUTHORS: Glagolev N.M., Doctor of Technical Sciences, Professor  
Ibragimov A.B., and Tsvetkova N.I. Candidates of  
Technical Sciences.

TITLE: Development Trends in Diesel Locomotive Engines  
(Napravleniya Razvitiya Teplovoznykh Dvigatelye)

PERIODICAL: Vestnik Mashinostroyeniya, 1959, Nr 3, pp 3-8 (USSR)

ABSTRACT: Table 2 shows the power per ton of train weight and the fuel consumption per 10,000 ton kilometers and illustrates the sharp rise in cost with speed. The track throughput capacity is more substantially raised in freight trains by larger train weights. Assuming 65 kph, the prospect of diesel trains in stages 6000-8000 ton trains requiring 6000-8000 hp or 1000-1000 hp per section. Wheel adhesion conditions lead to specific weight requirements of 4.5 kg/effhp for freight traction and 2.3 kg/ehp for passenger traction. A high efficiency is the overriding requirement favouring four-stroke engines. The maintenance cost comes next to fuel cost, favouring as low an engine speed as is consistent with the specific weight requirement namely 1000 rpm

Card 1/4

SOV/111-57-3-1/41

# Development Trends in Diesel Locomotive Engines

for freight engines and 1500 hp for passenger engines. The four-stroke engine is also favored by the possible avoidance of liquid piston coatings and the increased temperature of cooling water and lubricating oil. Based on these premises four variants of locomotive diesel engines have been proposed at the internal combustion engine department of the Khar'kov Polytechnic Institute (Khar'kovskiy Politekhnikeskii Institut) Imeni V.I. Lenin. The project of the "other development" is a diesel turbine plant designated 160LN2+G7, comprising a four-stroke diesel engine with exhaust gas turbine and supercharger and an auxiliary engine so chosen that the gas turbine power exceeds the supercharger requirements and the surplus power is coupled to the engine output. Table 3 lists the main engine data alongside those of the existing 2D100, 9D100 and 6D engines. The 3000 hp, 1000 rpm, 16 cylinder, 240mm bore, 270 mm stroke, 13.8 kg/cm<sup>2</sup> mean effective pressure, 1750 g/effective hp engine has a gas turbine of 1100 hp output at a turbine inlet temperature of 500°C. The supercharger consumes

Card 2/4

SOV/122-59-3-1/42

Development Trends in Diesel Locomotive Engines

550 hp delivering a pressure of 2.5 ata. The turbine inlet pressure is 3.7 ata. The overall weight of the plant is 15 tons and the engine measures 5.1 x 1.6 x 2.1 m. A theoretical study has shown the substantial gain in efficiency and specific power due to a turbine inlet pressure in excess of the supercharge pressure. The engine can be converted to natural gas. The engine inlet temperature of 80°C permits constant power under tropical conditions. The cooling water temperature of 110°C slightly reduces the heat rejection and greatly reduces the size and weight of the radiators. An experimental two-cylinder unit tested at the Department's laboratory has confirmed the design analysis. Fig 3 shows an indicator diagram illustrating a pressure rise not exceeding 1.7 kg/cm<sup>2</sup> per degree C and a pressure rise during combustion not exceeding a ratio of 1.3. The cooling losses amount to 13% to the cooling water and 8% to the oil at rated power. Development is proceeding to reduce consumption and increase power. So far, the equivalent of 3500 hp at a consumption of 145-146 g/e.hp.hr have been reached. Table 4 lists 9

Card 3/4

30V/122-58-3-1/42

Development Trends in Diesel Locomotive Engines

variants of the basic engine with powers ranging from 1500 to 4000 hp in different cylinder arrangements (16V, 12V, 8V and 8-in line). High-power is achieved by cooling the inlet air and increasing the inlet pressure at the expense of an air cooler and a lower excess air coefficient. A variant with a compression ratio of 15, reducing the fuel consumption to 0.140 from the basic 0.150 kg/e.hp.hr is included. Another variant with a higher fuel consumption has ordinary exhaust turbine supercharging without excess turbine power, offering lower component temperatures and elimination of liquid cooling of the piston.

Card 4/4

There are 3 figures, 4 tables and 6 references (5 Soviet, 1 English)

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000

S/262/62/000/008;019/022  
1007/1207

AUTHOR: Glagolev, N. M.

TITLE: Present-day state and trends in the development of engine design and construction

PERIODICAL: Referativnyy zhurnal, otdel'nyy vypusk. 42. Silovyye ustanovki, no. 8, 1962, 62, abstract 42.8.348. (In collection Vopr. mashinostr. Tr. Nauchno-tekhn. konferentsii po razvitiya proizvodit. sil Kharkovsk. ekon. adm. r-na. Kiev. AN USSR, no. 3, 1960, 44-60)

TEXT: A study is made of power potential, efficiency, weight and fuel consumption of marine and locomotive diesel engines. The KhPI is designing (1960) a locomotive diesel-engine of 3000 bhp with a specific fuel consumption of 150g/hp. hr; at the machine-building plant im. Malyshev, work is under way to increase the capacity of the Д-100 (D-100) engine up to 3000 bhp and to equip the diesel engines with turbo-chargers; experiments were carried out on the use of low-grade fuels in the Д-50 (D-50) diesel engine, etc. The paper also presents a review of the foreign diesel engines MAN 45/66, K6V 30/45, RV24/30, Stork, Mercedes-Benz 17.5/20.5 and other types. There are 2 figures and 3 tables. ✓

[Abstracter's note: Complete translation.]

Card 1/1

GLAGOLEV, N.M., doktor tekhn.nauk, prof.

Methods for increasing the efficiency of diesel locomotive  
engines; mechanical and effective efficiency. Teplovoz.i sud.  
dvig. no.3:5-31 '62. (MIRA 16:2)  
(Diesel locomotives)

GLAGOLEV, N.M., prof.; KRUSHEDOL'SKIY, G.I., dotsent; IERAGIMOV, A.B.,  
dotsent

The D70 diesel locomotive engine. Elek. i topl. tiaga no.6:14-15  
Je '62. (MIA 15:7)  
(Diesel locomotives)

GLAGOLEV, N.M., prof.; STRUNGE, B.N.

Letter to the editor, Vest. mashinostr. 43 no.6:43 Je '63.  
(MIRA 16:7)

1. Zaveduyushchiy kafedroy dvigateley vnutrennego sgoraniya  
Khar'kovskogo politekhnicheskogo instituta imeni Lenina (for  
Glagolev). 2. Glavnyy konstruktor Khar'kovskogo zavoda trans-  
portnogo mashinostroyeniya imeni V.A. Malysheva (for Strunge).  
(Internal combustion engines)

GLAGOLEV, Nikolay Matveyevich; KURTOV, Aleksandr Alekseyevich;  
VOLGOLAZHCHENKO, Vitaliy Vasil'yevich; KALASH, Fevzeniy  
Tarasovich; SAGOLAY, A.G., red.

[Internal combustion engines and gas turbines for diesel  
locomotives] Teplovye dvigateli vnutrennego sgoraniya  
i gazovye turbiny. Izd. 2., perer. Moskva, Transport,  
1965. 400 p. (MIRA 12:6)

L 46037-66 TET(m)/TIR(t)/TET LIT(a) JN/CM/37

ACC NR: AT6022712

SOURCE CODE: UR/2848/66/000/041/0232/0238

AUTHORS: Krestovnikov, A. N.; Glazov, V. M.; Glagoleva, N. N.; Situlina, O. V.

ORG: Moscow Institute of Steel and Alloys, Department for Physico-chemical Investigation of Processes for the Manufacture of Semiconductor Materials and Pure Metals (Moskovskiy institut stali i splavov, Kafedra fiziko-khimicheskikh issledovaniy protsessov proizvodstva poluprovodnikovykh materialov i chistykh metallov)

TITLE: Investigation of viscosity and electrical conductivity of binary alloys of tellurium with germanium, tin, and lead in the liquid state

SOURCE: Moscow. Institut stali i splavov. Sbornik, no. 41, 1966. Fizicheskaya khimiya metallurgicheskikh protsessov i sistem (Physical chemistry of metallurgical processes and systems), 232-238

TOPIC TAGS: tellurium containing alloy, germanium containing alloy, lead containing alloy, tin containing alloy, electrical conductivity, fluid viscosity

ABSTRACT: The viscosity and electrical conductivity of the binary systems TeGe, TeSn, and TePb were investigated. The alloys were prepared after the method of L. Ya. Krol', A. Ya. Nashel'skiy, and M. D. Khlystovskaya (Zavodskaya laboratoriya, 1961, No. 2). The experimental procedure for the determination of viscosity and electrical conductivity is described by V. M. Glazov and S. N. Chizhevskaya (DAN SSSR, 1964, t. 154, No. 1). The experimental results are presented in tables and graphs (see Fig. 1). It was found that in order to retain a stoichiometric composition in

Card 1/2

I. 45037-66

ACC NR: AT6022712

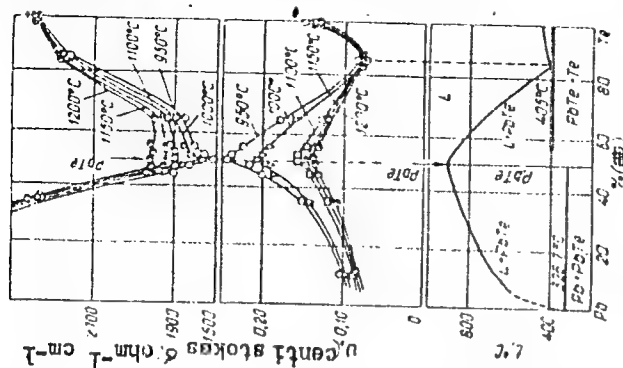


Fig. 1. Isotherms for the viscosity and electrical conductivity of melts for the system lead-tellurium.

the systems GeTe and SnTe it is necessary to maintain an equilibrium vapor pressure of Te above the corresponding systems. The compound PbTe is relatively stable, but it is recommended that, when working with this compound, care is to be exercised in not exceeding its thermal stability limits. Orig. art. has: 1 table and 9 graphs.

SUB CODE: 11/ SUBM DATE: none/ ORIG REF: 010/ OTH REF: 001

Card 2/2

L-54701-65 EWT(m)/ENG(m)/EWP(t)/EWR(b) LJP(c) RIM/JD

ACCESSION NR: AP5013445

UR/0020/68/162/001/0094/0097

AUTHOR: Glazov, V. M.; Krestovnikov, A. N.; Glagoleva, N. N.

TITLE: Physico-chemical analysis of binary systems of tellurium with elements of the germanium subgroup in the liquid phase

SOURCE: AN SSSR. Doklady, v. 162, no. 1, 1965, 94-97

TOPIC TAGS: binary system, tellurium, germanium subgroup, tin, lead, alloy

ABSTRACT: Chemical interaction in the germanium-, tin-, and lead tellurides was studied in the liquid phase in order to elucidate the observed thermal stability of these compounds above their respective melting points. Several alloys of Te with Ge, Sn, and Pb were prepared by fusing high purity metal mixtures in evacuated (up to  $10^{-3}$  mm Hg) quartz ampules. The atomic ratio of Te:Ge varied from 1:9 to 9:1, that of Te:Sn varied from 2:8 to 9:1, and that of Te:Pb varied from 1:9 to 8:55:1.45. Dependence of viscosity and electrical conductivity upon temperature was measured in the 730° to 1200°C range and correlated with the phase diagrams of the Te-Ge, Te-Sn, and Te-Pb systems. For all three systems, maxima of viscosity and minima of electrical conductivity coincide with alloys containing 50 atomic %

Card 1/2

L 54701-65

ACCESSION NR: AP5013445

of Te. The extrema of viscosity and electrical conductivity indicate that melting of germanium telluride has a congruent character. A eutectic transition  $La+GeTe$  in the germanium telluride system occurs at  $725^{\circ}C$ . Slightly above their melting points, germanium- and tin tellurides are substantially dissociated while lead telluride is only very slightly dissociated. A substantial dissociation of the lead telluride melt first occurs about  $50^{\circ}-70^{\circ}C$  above the melting temperature. Orig. art. has: 1 table and 3 figures. The paper was presented to Academician I.V. Tananayev on Nov. 11, 1964.

ASSOCIATION: Institut stali i splavov (Institute of Steel and Alloys); Institut metallurgii im. A. A. Baykova (Institute of Metallurgy)

SUBMITTED: 31Oct64

ENCL: 00

SUB CODE: NM, GC

NO REF SOV: 010

OTHER: 001

Card 2/2 *mb*

BOGUSHEVSKIY, K.S.; GLAGOLEV, N.S.; SMIRNOV, I.I.; FILICHEV, S.V.

Written work for the proficiency certificate in geometry including  
the use of trigonometry and the evaluation of such work. Mat.v  
shkole no.3:12-23 My-Je '56. (MLRA 9:8)  
(Geometry--Problems, exercises, etc.)

ANDRONOV, I.K., professor; BEREZANSKAYA, Ye.S.; GLAGOLEV, N.S.; DEPMAN, I.Ya., professor; ZOLOTOVITSKIY, Ye.N.; IL'IN, A.Ye., dotsent; LYAPIN, S.Ye., Mulyarchik, M.Z., uchitel'; PETRAKOV, I.S.; CHICHIGIN, V.G.

Aleksandr Nikolaevich Barsukov. Mat. v shkole no.1:72-74 Ja-F '57.

(MLRA 10:2)

1. Moskovskiy oblastnoy pedagogicheskiy institut (for Andronov).
  2. Zaveduyushchiy kafedroy metodiki matematiki Moskovskogo pedagogicheskogo instituta imeni V.I. Lenina (for Beresanskaya).
  3. Metodist Shcherbakovskogo rayona goroda Moskvy (for Glagolev).
  4. Leningradskiy pedagogicheskiy institut (for Depman).
  5. Metodist Balashikhinskogo rayona Moskovskoy oblasti (for Zolotovitskiy).
  6. Moskovskiy pedagogicheskiy institut imeni V.I. Lenina (for Il'in).
  7. Zaveduyushchiy kafedroy metodiki matematiki leningradskogo pedagogicheskogo instituta imeni A.I. Gertsena (for Lyapin).
  8. Shkola No.29 goroda Moskvy (for Mulyarchik).
  9. Zaveduyushchiy kabinetom matematiki Moskovskogooblastnogo instituta usoversheystvovaniya uchiteley (for Petrakov).
  10. Zaveduyushchiy kafedroy metodiki matematiki Moskovskogo pedagogicheskogo instituta imeni V.P. Potemkina (for Chichigin).
- (Barsukov, Aleksandr Nikolaevich, 1891-)

GLAGOLEV, N.S.; LEPESHKINA, N.I., red.; SMIRNOV, G.I., techn.red.; KREYS,  
I.G., tekhn.red.

[Teaching mathematics in schools for working youth; a collection  
of articles] Iz opyta prepodavaniia matematiki v shkolakh rabochei  
molodezhi; sbornik statei. Moskva, Gos. uchebno-pedagog. izd-vo  
M-ve prosv. RSFSR, 1958. 191 p. (MIRA 12:2)  
(Mathematics--Study and teaching)

GLAGOLEV, N.S.; ORLOV, Ye.A.; TOHAZOV, N.G.; DE-PEL'FOR, G.Ye.;  
CHURAYEV, I.K., red.; SELIVERSTOVA, A.I., red. izd-va;  
VORONINA, N.K., tekhn. red.

[Mathematics for correspondence technical schools] Matematika dlia vsochrykh tekhnikov. Moskva, Vysshaya shkola.  
Pt.2. [Geometriya Geometria. 1963. 210 p. Pt.3. [Elements of higher mathematics] Elementy vysshei matematiki. 1961. 430 p. (MIRA 17:2)

GLAGOLEV, Nikolay Sergeyevich; ORLOV, Yevgeniy Aleksandrovich;  
TOPAZOV, Nikolay Gennadiyevich; DE-FEL'FOR, Georgiy  
Yevgen'yevich; CHURAYEV, P., red.; SELIVERSTOVA, A.,  
red.izd-va; VORONINA, K., tekhn. red.

[Mathematics for technical correspondence schools] Matematika dlia zaochnykh tekhnikumov. Moskva, Vysshaia shkola. Pt.1.[Algebra and simple functions] Algebra i prostieishie funktsii. 1963. 481 p. (MIRA 17:2)

1. Zaveduyushchiy kafedroy matematiki Mo.kovskogo arkhitekturnogo instituta (for Churayev).

GLAGOLEV, Pavel Alekseyevich; IPPOLITOVA, Valentina Ivanovna; GRIGOR'YEV,  
Ye.P., redaktor; USTIMENKO, L.F., redaktor; SOKOLOVA, N.N.,  
tekhnicheskiy redaktor

[Anatomy of farm animals with principles of histology and embryology]  
Anatomiia sel'skokhoziaistvennykh zhivotnykh s osnovami gistologii i  
embriologii. Moskva, Gos. izd-vo sel'khoz. lit-ry, 1956. 472 p.  
(Veterinary anatomy) (MIRA 10:3)

GLAGOLEV, P.A.

Effect of keeping chicks in cages on the development of the body.  
Biol.MOIP.Otd. biol. 61 no.3:110 My-Je '56. (MLRA 9:10)  
(POULTRY)

Country : USSR  
 Category : Periodical  
 Abs. Jour : Zh. Zool.-Mikrob., 1977, 15, 12, 2000  
 Author : Glogolov, P. A.  
 Institut. : Research Institute of Microbiology, Academy of Sciences of the USSR  
 Title : Further Development of the Theory of the Origin of the Bacteria of the Genus *Escherichia* Proposed by A. P. Illiev.  
 Orig Pub. : Dokl. Akad. Nauk SSSR, 1977, 235, 1-2, 1-2  
 Abstract : A review of A. P. Illiev's work is presented. Special attention is drawn to investigations of the inner structure of bacterial cells.

Card: 1/1  
 \*Tsimirzhev.

USSR/Fern. Animals. Horses

Q-2

Abs Jour : Ref Zhur - Biol., No 11, 1958, No 49955

Author : Glazov F.A.

Inst : Moscow Academy of Agriculture named K.M. Timiryazev

Title : Structural Characteristics of the Trunk of the Body in New-born Foals as Compared to Adult Horses. (First Report).

Orig Pub : Dokl. Mosk. s.-kh. akad. im. K.M. Timiryazeva, 1957, vyp. 27, 279-281

Abstract : A number of differences between skeleton of newborn foals (NF) and adult horses (AH), as connected with their developmental processes, was established in investigations performed on 10 NF and several AH of various ages. In particular, it was demonstrated that on the whole NF skeletons are relatively heavier than the AH skeletons, a fact which also applies to axial skeleton in relation to peripheral skeleton, while the reverse is true for AH. NF skulls are relatively shorter but heavier than AH skulls, and their brain section is relatively longer, higher and wider, while

Cord : 1/2

USSR/Foreign Animals. Horses

Q-2

Abstr Jour : Rev Zhur - Biol., No 11, 1958, No 49953

snout section is shorter, narrower and lower. In NF, the width of the chest vertebrae in relation to the length of the body is larger. The width of the lumbar vertebrae is smaller in NF than in AH. Relative musculature weight is larger in NF than in AH. In NF, muscles which function intensively during the initial life period, are the most developed (spinal and thoracic muscles). NF musculature is more dynamic than AH musculature.

Card : 2/2

GLAGOLEV, P.A., prof., doktor nauk; IPPOLITOVA, V.I., dots., kand. nauk.

Age changes in the weight of somatic muscles of horses. Dokl. TSKhA  
no.27:282-283 '57. (MIRA 11:4)

(Muscles) (Horses--Anatomy)

\_\_GLAGOLEV, P.A., prof., doktor biol.nauk

Effect of runway and cage maintenance on anatomical characteristics  
of hens. Izv. TSKhA no.4:129-136 '58. (MIRA 11:10)  
(Poultry--Anatomy)

GLAGOLIV, P.A., doktor biol.nauk prof.

Characteristics of the internal structure of muscles of certain species of mammals in relation to various conditions of existence. Izv.TSKhA no.4:155-170 '59. (MIRA 12:11)  
(Mammals) (Muscles)

GLAGOLEV, P.A.

Effect of the conditions of life on the structure of the system  
of voluntary movement organs in mammals. Biul.MOIP. Otd.biol.  
no.3:154-155 My-Je '60. (MIRA 13:7)  
(MORPHOLOGY (ANIMALS)) (ANIMAL MECHANICS)

AKAYEVSKIY, A.I., prof.; BOGOLYUBSKIY, Sergey Nikolayevich, prof.;  
VOKKEN, Gans Gansovich, prof.; GLAGOLEV, Pavel Alekseyevich,  
prof.; ZHEDENOV, V.N., prof.; PETROVSKAYA, L.P., red.;  
VORONINA, R.K., tekhn.red.

[Anatomy of domestic animals] Anatomiia domashnikh zhivotnykh  
v trekh chastiakh. Moskva, Gos.izd-vo "Vysshiaia shkola." Pt.1.  
[System of the motor organs] Sistema organov dvizheniia. Pod  
red. A.I.Akaevskogo. 1961. 390 p. (MIRA 15:5)  
(Veterinary anatomy)

GLAGOLEV, Pavel Alekseyevich; IPPOLITOVA, Valentina Ivanovna;  
DREVLANSKAYA, N.I., red.; MAKHOVA, N.M., tekhn. red.;  
PRCKOF'YEVA, L.N., tekhn. red.

[Anatomy of farm animals with principles of histology and  
embryology] Anatomiia sel'skokhoziaistvennykh zhivotnykh s osno-  
vami gistologii i embriologii. 2., perer. izd. Moskva, Sel'-  
khozizdat, 1962. 471 p. (MIRA 15:7)  
(Veterinary anatomy)

GLAGOV, P.A.

Anatoliy Lvovich Glagovskii, 1894-; on the 70th birthday and  
the 45th anniversary of his scientific, pedagogical and civic  
activities. Arkh. mat. i est. nauk. SSSR. 1964. 18:1.  
(USSR 18:1)

POKAMESTOV, V.V.; GLAGOLEV, P.P.; LUK'YANGV, A.D.

Preparation of peat bogs by deep continuous milling. Trudy  
VNIITP no.21:3-93 '63. (MIRA 17:3)

PLAVOLEV, S. I.

PLAVOLEV, S. I.--"Certain Problems of Clinico-Anatomic Characterization of Endocarditis." (Dissertation for Degrees in Science and Engineering Defended at USSR Higher Educational Institutions.) Sverdlovsk State Medical Inst, Sverdlovsk, 1955

SO: Krasnaya Letopis' No. 27, 12 Aug 55

6. The above is a translation of the original.

... ..

... ..

HAMM, V. L.

Final Report on the investigation of the activities of the subject, 1946-1947. (S-1) (C)

10271.001

GLAGOLEV, Viktor Arsen'evich; SLOBODNIKOV, A. I., redaktor; OSIPENOV, N. A.,  
tekhnicheskii redaktor

[Mining] Uchenye zapiski. Moskva, (ser. tekhnicheskoe-pedagog. i inzh.-vo  
Trudrezervizdat, 1957. 223 p. (Mina 10.19)  
(Mining engineering)

S/138/62/000/001/009/009  
A051/A126

AUTHORS: Koshelev, F.F.; Il'yin, N.S.; Glazolev, V.A.

TITLE: Production of adhesives on laboratory scale

PERIODICAL: Kauchuk i rezina, no. 1, 1962, 54

TEXT: A method has been developed for producing adhesives in quantities of 150 - 500 g, for studying their properties in the laboratory. An instrument for grinding fabric, manufactured at the Kiev Plant of Medical Appliances, was used (Fig. 1). Dissolution takes place in the glass container (3), with knives having cutting and mixing blades and rotating at a speed of 4,000 or 8,000 rpm. The compression rubber-metal collar and rubber linings of the head (2) were replaced in the plant instrument by a rubber collar and linings, made of oil-benzene-resistant rubber, manufactured at the "Kauchuk" Plant. The preparation of the solution takes about 10 - 20 min, depending on the type of rubber or the rubber mix composition. The described instrument can be used to produce adhesives containing 60 - 100% by weight of active filters, up to 100 w.p. of rubber, and also viscose rubber solutions. The head and blades must be disassembled periodically for cleaning and lubricating of the rotary parts. There are 2 figures.


Card 1/2

Production of adhesives on laboratory scale

S/132/62/006/001/009/009  
A051/A126

ASSOCIATION: Moskovskiy Institut tonkoy khimicheskoy tekhnologii im. M.V. Lomonosova (Moscow Institute of Fine Chemical Technology im. M.V. Lomonosov)

Figure 1: Diagram of the instrument for fabric grinding. 1 - body of the instrument; 2 - head; 3 - glass container; 4 - cover; 5 - knives; 6 - electrical switch; 7 - clutch with a square top; 8 - electric safety device.

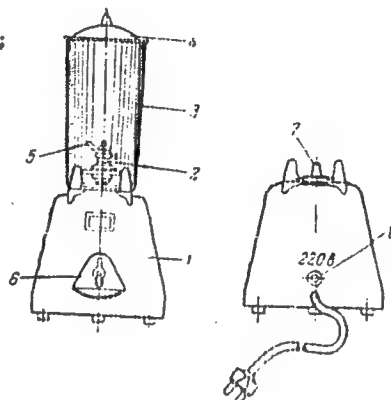

Card 2/2

GLAGOLEV, Viktor Artem'yevich; ZHUKOV, Vsevolod Vasil'yevich; BOYKO,  
A.A., red.; OKHREBYNKO, V.A., red. izd-va; MALOTHEVA, Z.A.,  
tekhn. red.

[Technical principles of the mining and fuel industry] Osnovy  
tekhnologii gornorudnoi i toplivoi promyshlennosti. Pod red.  
A.A. Baiko. Moskva, Gosgortekhnizdat, 1962. 382 p.

(Mineral industries)

(MIRA 15:9)

L 10102-63

Pr-4 RM/WW/MAY

ACCESSION NR: AP3003267

EPR/EWP(j)/EPF(c)/EWT(m)/BDS

AFTTC/ASD

Ps-4/Pc-4/

S/0286/63/000/003/0046/0046

AUTHOR: Glagolev, V. A.; Il'in, N. S.; Il'ina, T. B.

70

TITLE: Method of bonding rubber to metal. Class C C8d; 39b, 5 sup 20.  
No. 152952

SOURCE: Byul. izobreteniy i tovarnykh znakov, no. 3, 1963, 46

TOPIC TAGS: rubber, rubber mix, metal, bonding, cobalt acetate, vulcanization,  
heat treatment, rubber-to-metal bonding

ABSTRACT: An author's certificate has been issued for a method for bonding  
rubber to metal by application of a rubber mix containing cobalt acetate to the  
metal, followed by vulcanization. To improve the adhesive-bond strength, the  
cobalt acetate is subjected to preliminary heat treatment.

ASSOCIATION: none

SUBMITTED: 00

DATE ACQ: 23Jul63

ENCL: 00

SUB CODE: 00

NO REF SOV: 000

OTHER: 000

Card

1/1

GLAGOLEV, VIKTOR ARTEMYEVICH

"Osnovy Tekhnologii Gornorudnoy i Toplivnoy Promyshlennosti."  
Pod. Red. A.A. Boyko. Moscow, GOSGORTekhnizdat, 1962  
382p. illus., diagr., graphs, tables.

L 40737-65 EPA(s)-2/EWT(m)/EPF(c)/EWP(v)/EPR/ENP(j)/T/EWP(t)/EWP(r)/EWP(b)/  
EWA(c) PC-4/PF-4/PT-4/PS-4 JD/WN/EM/EM  
ACCESSION NR: AP5010898 UT/0286/65/000/007/0086/0086

AUTHOR: Akopyan, A. N.; Glagolev, V. A.; Il'in, N. S.;  
Krbekyan, G. Ye.; Kurdin, L. N.; Sinanyan, E. G.

TITLE: A method of cementing rubber to metal, Class 12, No. 169728

SOURCE: Byulleten' izobreteniy i tovarnykh znakov, no. 7, 1965, 86

TOPIC TAGS: rubber to metal bond, chlorinated polymer, cemented rubber

ABSTRACT: A solution of a chlorinated copolymer of tetrachloro-  
hexatriene and styrene, or acrylonitrile in an organic solvent can  
be used in cementing rubber to metal in the course of vulcanization.  
This extends the assortment of bondable rubber types and may serve  
to improve bond strength. [VS]

ASSOCIATION: none

SUBMITTED: 21Dec62

ENCL: 00

SUB CODE: MT, OC

NO. REF SOV: 000

OTHER: 000

ATD PRESS: 3231

Card 1/1



1511  
S/892/62/000/001/014/022  
B102/B186

AUTHORS: Doroshenko, G. G., Glagolev, V. I., Filyushkin, I. V.;  
Afanas'yev, M. I.

TITLE: Calculation of the counting efficiency in fast-neutron  
recording for a detector with an organic crystal

SOURCE: Moscow. Inzhenerno-Fizicheskiy institut. Voprosy dozimetrii  
i zashchity ot izlucheniya, no. 1, 1962, 90-99

TEXT: The counting efficiency  $\epsilon(E, B)$  is calculated for a fast-neutron  
detector with a 30 mm-thick stilbene crystal as scintillator;  $E$  is the  
neutron energy and  $B$  the recording threshold, i.e. the lowest neutron  
energy recorded. In stilbene the neutrons are recorded via the recoil  
protons or via nuclear reactions with carbon or hydrogen. The carbon  
nuclei play an important part since their density is higher ( $C_{14}H_{12}$ ), and  
in the high-energy range the total  $(n, C)$  interaction cross-section is of  
the order of that of  $(n, p)$  scattering. Multiple scattering effects are  
negligible for medium-size crystals. In first approximation (single  
scattering)  $\epsilon_1$  is calculated from the collision probability

Card 1/3

Calculation of the counting ...

S/892/62/000/051/014/022  
B102/B186

$$P_1(E_0) = \int_0^l e^{-\bar{\sigma}(E_0)(l-x)} n_0(E_0) dx = \frac{\sigma(E_0)}{\bar{\sigma}(E_0)} (1 - e^{-\bar{\sigma}(E_0)l}) \quad (3)$$

for the distance  $l-x$  from the left window. Since  $\epsilon_1(E, B) = P_1(E_0) d\alpha = P_1(E_0) \alpha_B$  (where  $\alpha = E/E_0$ , the neutron energy fraction retained after the first collision,  $E$  being the energy of the scattered neutron) and  $\alpha_B = (E_0 - B)/E_0$ , one obtains

$$\epsilon_1(E, B) = \frac{\sigma(E_0)}{\bar{\sigma}(E_0)} (1 - e^{-\bar{\sigma}(E_0)l}) \left(1 - \frac{B}{E_0}\right) \quad (5)$$

where

$$\left. \begin{aligned} n\bar{\sigma}(E) &= n_0(E) + n_c \sigma_c(E) \\ \bar{\sigma}(E) &= \sigma(E) + \frac{n_c}{n} \sigma_c(E) \end{aligned} \right\} \quad (1)$$

( $n$  and  $n_c$  being the nuclear concentrations of H and C;  $\sigma(E)$  the  $(n, p)$  scattering cross-section;  $\sigma_c(E)$  the total  $(n, C)$  scattering cross-section)

Card 2/3

Calculation of the counting ...

S/892/62/000/001/014/022  
B102/B186

In the case of double scattering,

$$\epsilon_1(E_0, B) = \int_0^{E-B} P_1(\beta E_0, E_0) \frac{dE}{E_0} = \int_0^B P_1(\beta E, E_0) d\beta \quad (11)$$

is obtained (where  $\beta = E/E_0$  and  $\beta_0 = 1 - E/E_0$ ). From a comparison of the energy dependences of  $\epsilon_1$  and  $\epsilon_2$  it can be seen that at low energies the  $\epsilon_2$  curves lie higher than the  $\epsilon_1$  curves. The role of  $\epsilon_2$  is reduced with increasing neutron energy, and for ~11 Mev neutrons both curves coincide. The effect of double scattering increases with E. The peaks of the  $\epsilon$ -curves are due to the resonance character of the (n,0) scattering cross-section. There are 5 figures.

Gard 3/3

ACCESSION NR: AT4021265

S/2892/63/000/002/0152/0157

AUTHOR: Doroshenko, G. G., Glagolev, V. I., Barabanov, I. R., Filyushkin, I. V.

TITLE: Application of the denumerable efficiency method for measuring the spectra of fast neutrons

SOURCE: Voprosy\* dozimetrii i zashchity\* ot izlucheniya, no. 2, 1963, 152-157

TOPIC TAGS: denumerable efficiency, fast neutron, Monte Carlo method, neutron spectrum, photomultiplier, FEU-33, computer, BESM-2, trapezoidal rule, Simpson rule

ABSTRACT: In this paper, a new method for the study of neutron spectra -- the denumerable efficiency method -- is discussed. This method has the advantage that it is applicable to any shape of spectral line and the initial data used in this method are the integral count velocities, thereby decreasing a statistical error. The main principle of this method is contained in the use of the known dependence of the absolute denumerable efficiency in registering  $\epsilon(E, B)$  on the neutron energy  $E$  and the energy threshold  $B$  of the neutron counter. Of the possible methods studied, the trapezoidal rule and Simpson rule are the most suitable. The results are presented and verified in graphs. The authors find the development of a multi-

Card 1/2

ACCESSION NR: AT4021265

threshold analyzer to be most expedient because of its considerable simplicity, as compared with the multichannel analyzers now in use. The authors claim this method will simplify considerably the task of obtaining spectra. The authors express their gratitude to V. G. Zolotukhin for his interest in the article and for his valuable advice. Orig. art. has: 3 figures and 6 formulas.

ASSOCIATION: Moskovskiy inzhenerno-fizicheskiy institut (Moscow Physics and Engineering Institute)

SUBMITTED: 00

DATE ACQ: 06Apr64

ENCL: 00

SUB CODE: NS, PH

NO REF SOV: 004

OTHER: 007

Card 2/2

ACCESSION NR: AT4021266

S/2892/63/000/002/0158/0161

AUTHOR: Doroshenko, G. G., Glagolev, V. I., Barabanov, I. R., Filyushkin, I. V.

TITLE: Application of the denumerable efficiency method for measurement of the spectra of  $\gamma$  quanta

SOURCE: Voprosy\* dozimetrii i zashchity\* ot izlucheniya, no. 2, 1963, 158-161

TOPIC TAGS: denumerable efficiency,  $\gamma$  rays,  $\gamma$  quanta, shield, energy threshold,  $\gamma$  spectrometry, organic scintillators, cobalt 60

ABSTRACT: The authors use the denumerable efficiency method for measuring  $\gamma$  spectra. This new method is described by Doroshenko, G. G. and Larichev, A. V. (Izv. AN SSSR, Ser. fiz. 27, No. 1, 141, 1963). The continuous spectra of  $\gamma$  rays obtained in the scattering of  $\gamma$  quanta of cobalt 60 in shields of iron, lead and their combination, are studied. The measurement results of the  $\gamma$  spectra with eight thresholds are presented in graphs. Based on the data, the authors suggest the development of a simple portable  $\gamma$  spectrometer. The denumerable efficiency method makes it possible to use organic scintillators for  $\gamma$  spectrometry. The authors express their gratitude to A. V. Larichev for his contribution of experimental data. Orig. art. has: 4 figures and 3 formulas.

Card 1/1

DOROSHENKO, G.G.; GLAGOLEV, V.I.; BARABANOV, I.P.; FILYUSHKIN, I.V.

Results of measurements of fast neutron spectra using the  
counting efficiency method. Izv. AN SSSR. Ser. fiz. 27  
no.10:1308-1312 0 '63. (MIRA 16:10)

ADDISON AC: 44-320327

S/0089/64/016/003/0218/0223

AUTHORS: Doroshenko, G. G.; Glagolev, V. I.; Karabanov, I. R.; Filyushkin, I. V.

THIRD: Analysis of reliability of methods of studying continuous spectra of fast neutrons. . . . .

ЖУРНАЛ: Атомная энергия, т. 16, № 3, 1964, 218-225

TOP 171331: neutron spectrum, fast neutron, gamma quantum, radiation spectrum, analytical method, neutron dosimetry

Abstract: This is a new method for studying the continuous fission spectra with analysis from the viewpoint of reliability. The physical reliability of method of studying the continuous spectra of fast neutrons and Y-quanta is evaluated on the basis of applying criteria of conditionality of linear equation systems. The matrix integral and differential methods of spectroscopy with respect to the shape of the line are discussed and compared. It is shown that method of the relationship of conditionality of line shape is more reliable in any range is studied. An advantage is shown for the method of the relationship with poor line shapes. The authors are grateful to V. G. Zolotarev and his

Car: 2/2

[illegible]

the 1960s in the "new helpful directions." Orig. art. has: 10 equations, 10 figs., 1 table.

... ..

تاریخ: ۲۹/۵/۱۳۹۵

DATE ACQ: 01MAR64

ENCL: 00

300 301 302

NO REF COPY: 000

OTHER: 005

Card 2/2

L02995-66 EWT(m)/EIF(c)/EIP(j) RM

ACCESSION NR: AP5016635

UR/0138/65/000/005/0019/0024  
678.046.2.002.2.001.4 223

AUTHORS: Zuyev, V. P.; Gilyazetdinov, L. P.; Gryl'misaryan, T. G.; Safronov, N. Ya.; Vornshchikov, I. D.; Glagolev, V. I.; Taygankova, E. I.; Sokolova, V. V.; Bystrov, K. M.; Khokhlov, B. P.

TITLE: Some peculiarities of the production of carbon black PM 70 in cyclone-type reactors by using thermocatalytic gas oil

SOURCE: Kauchuk i rezina, no. 6, 1965, 19-24

TOPIC TAGS: gas oil fraction, carbon black, catalytic cracking / PM 70 carbon black

ABSTRACT: The production of active carbon black PM-70 from a 1:1 mixture of thermocatalytic gas oil and green oil was investigated to correct certain technological parameters and to determine the behavior of carbon black during its recovery and processing. The tabulated physico-chemical properties of green oil, and their mixture show that the thermocatalytic gas oil is distinguished by a high polycyclic aromatic hydrocarbon content. The analysis of several gas oil fractions showed that its kinematic viscosity at 50C varies over a range of

Card 1/3

L0995-66

ACCESSION NR: AP5016635

9.5-11.8 x 10<sup>-2</sup> m<sup>2</sup>/sec. The viscosity of the 1:1 mixture varies from 3.6 to 3.9 x 10<sup>-2</sup> m<sup>2</sup>/sec. The kinematic viscosity plotted against heating temperature shows that the green oil and gas oil have the same viscosity only at a temperature of 280-300C. The viscosity value of 1.05 x 10<sup>-2</sup> m<sup>2</sup>/sec is reached for green oil only at 100C, and for gas oil and green oil mixture at 140C. Pure gas oil has this viscosity at 185C. The high viscosity, high boiling point, and the wide fractional composition of the gas oil make it necessary to preheat it by 80-100C higher than the green oil at minimum 160C before its introduction into the reactors. The average diameter of the droplet of raw material is plotted against the vaporizing air flow rate and the temperature before the atomizer. With an increase in the air flow rate from 0.45 to 1.0 m<sup>3</sup>/kg, the diameter of the droplet decreased 2.0-2.2 times. During the experiments the gas oil content in the mixture, the heating temperature, and the specific flow rate of vaporizing air were varied. The other technological parameters were almost constant (total specific air flow rate of 4.8-5.1 m<sup>3</sup>/kg, gas flow rate of 0.25-0.28 m<sup>3</sup>/kg of raw material, reactor temperature of 1395-1400C). Tabulated data show that by increasing the air flow rate and temperature the specific surface and the oil content of carbon black were increased, while the optical density of the benzene extract of carbon black decreased. The technological data and properties of carbon black PA-70

Card 2/3

L00905-66

ACCESSION NR: AP5016635

are tabulated and discussed. It was established that the carbon black yield is almost the same as that obtained from pure green oil. The thermophysical properties of the gaseous reaction products of carbon black formation are compared. Vulcanizates obtained with PH-70 carbon black have a higher tear strength due to the larger specific surface and oil content. Experimental data show that a carbon black plant equipped with cyclone-type reactors and a dry system of carbon black recovery can be altered to use a mixture of gas oil and green oil. An increase in the vaporizing air flow rate leads to an increased dispersal and oil content of PH-70 carbon black and to the decrease in coking of reactors. It is recommended to increase the air flow rate to 1.0 m<sup>3</sup>/kg oil. The addition of gas oil to green oil results in the stabilization of the granulation operation on the ASA 1 drums. Orig. art. has: 4 figures and 3 tables.

ASSOCIATION: Nauchno-issledovatel'skiy institut shinnoy promyshlennosti (Scientific Research Institute for the Tire Industry); Novo-Yaroslavskiy mashinnyy zavod (Novo-Yaroslavl Carbon Black Plant)

SUBMITTED: 00

ENCL: 00

SUB CODE: PP, QC

NO REF SOV: 005

OTHER: 001

Card 3/3 *SP*

NOV 16 1964

21(7)

AUTHORS:

Gerasimov, V. L., Kuznetsov, G. M., Morozov, V. V.,  
Yampol'skiy, A. A.

TITLE:

Isotopes With Millisecond Periods Formed in Reactions With  
Neutrons With Energies of 10 Mev. Laboratory and Background  
periods of the isotopes formed in reactions of neutrons with  
energies of 10 Mev.

PERIODICAL:

Zhurnal eksperimental'noy i teoreticheskoy fiziki, 1963,  
Vol. 16, No. 4, pp 1046-1057 (USSR)

ABSTRACT:

In the present paper the authors report on an investigation  
of the short lived ( $10^{-3} - 10^{-1}$  sec)  $\gamma$ -radiation occurring in  
reactions with the participation of 10 Mev neutrons. Investi-  
gations were carried out of Li, C, Na, Mg, Al, Si, Ca, Sc, Ti,  
V, Mn, Co, Ni, Zn, Ga, Ge, As, Se, Br, Rb, Cs, Fe, Sr, Y, Zr,  
Nb, Mo, Pd, Cd, In, Sn, Te, La, Ce, Ta, W, Au, Hg, Tl, Pb, Bi,  
Th, and U. In Mg, Al, Ge, As, Y, In, Pb, and Bi  $\gamma$ -activities  
of such small half-lives were found. The apparatus and the  
measuring method are first described in detail. The neutrons  
used originated from the reaction  $T(d,n)He^4$  and were accelerated

Card 1/1

Isomers With Millisecond Periods Formed in Reactions With Neutrons  
Energies of 14 Mev

SOV, 6 16-11 1970

in an accelerator of 500 kv (cf Ref 6). Irradiation was in pulses at the rate of 1 pulse per second. The square pulses received on the target had a duration of 1-5 msec and amplitudes of up to 2 ma; 2.10<sup>6</sup> neutrons/pulse were emitted. The neutron monitor worked with a photomultiplier FEU 30K with scintillator which was connected for neutron counts (plex glass), and with the PS-10000 detector (T. 100). For measuring  $\gamma$  radiation a NaI(Tl) crystal was used. The detector container with the photomultiplier FEU 3 was used. The methods for the determination of the half-life of the isomers and for estimation of the formation cross sections for  $\beta$  and  $\gamma$  are discussed in detail. Figure 1 shows a schematic diagram of the entire device. Figures 3, 6, 7, 11, 12 show spectra of the isomers. Measuring results are discussed individually for each isomer. The most important are contained in the following table:

Sample	Energy [Mev]	half-life [msec]	cross section [barns]	reaction
Mg	0.47±0.0	20±1	0.04±0.01	$^{24}\text{Mg} + n \rightarrow ^{24}\text{Mg}^* + \gamma$
Al	0.47±0.01	20±1	0.06	$^{27}\text{Al} + n \rightarrow ^{27}\text{Al}^* + \gamma$
			0.01	$^{27}\text{Al} + n \rightarrow ^{27}\text{Al}^* + \gamma$

Card 2/4

Isomers With Millisecond Periods Formed in Reactions With Neutrons With  
Energies of 14 Mev

307/56-56 4-13/70

Sample	$\gamma$ -energy (MeV)	half-life [ $\mu$ sec]	cross section [ $10^{-24}$ cm <sup>2</sup> ]	suggested reaction
Ge	0.17 $\pm$ 0.01	11 $\pm$ 1	0.5	-
As	0.38 $\pm$ 0.01	17 $\pm$ 1	0.15	As <sup>75</sup> (n,n')As <sup>75m</sup>
Y	0.24 $\pm$ 0.01	14 $\pm$ 1	-	Y <sup>89</sup> (n,n')Y <sup>89m</sup> Y <sup>89</sup> (n,2n)Y <sup>88m</sup>
In	0.32 $\pm$ 0.01	42 $\pm$ 2	0.8	In <sup>115</sup> (n,2n)In <sup>114m</sup>
Pb	0.48 $\pm$ 0.01; 0.94 $\pm$ 0.02; 0.58 $\pm$ 0.01; 1.04 $\pm$ 0.03	5 $\pm$ 0.5 8.10 <sup>2</sup> $\pm$ 1.5.10 <sup>2</sup>	- 1.5	Pb <sup>206</sup> (n,n)Pb <sup>206m</sup> Pb <sup>208</sup> (n,2n)Pb <sup>207m</sup>
Bi	0.48 $\pm$ 0.01; 0.86 $\pm$ 0.02	2.7 $\pm$ 0.3	0.6	Pb <sup>207</sup> (n,n')Pb <sup>207m</sup> Bi <sup>209</sup> (n,2n)Bi <sup>208m</sup>

Card 3/4

The authors finally thank O. I. Leypunskiy for his great help  
and O. B. Likin, N. M. Moleshin, N. K. Parshenkov, V. A. Sha-